


Flashing Light

"Led optic diameter 300 mm"

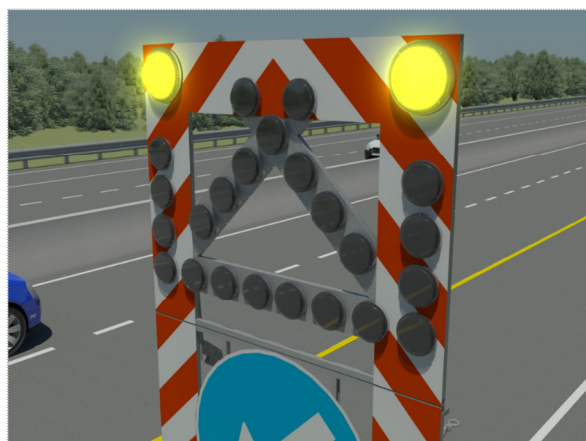

1

	Certifications: optics with Ministerial approval		Luminous intensity: UNI EN 12352 (class L9M) variable brightness		Type of Batteries: 18Ah / 40Ah / 100Ah / 180Ah		Dimensions (H / L / W): 34 x 34 x 4,5 cm 34 x 34 x 22 cm (with moplén case)
	Light source: nr. 232 high intensity leds		Power supply: 12 / 24 V _{dc}		Duration: standard flash mode 35h / 85h / 210h / 380h		Weight: 1,55 Kg 3,5 kg ((with moplén case)
	Light emission: Yellow (amber)		Twilight: on request		Photovoltaic kit: 50 W		Temperature: -15 °C - +85 °C

Code: **201900121-201900130** (standard flash mode)

	Certifications: optics with Ministerial approval		Luminous intensity: UNI EN 12352 (class L9M) variable brightness		Type of Batteries: 18Ah / 40Ah / 100Ah / 180Ah		Dimensions (H / L / W): 34 x 34 x 4,5 cm 34 x 34 x 22 cm (with moplén case)
	Light source: nr. 232 high intensity leds		Power supply: 12 / 24 V _{dc}		Duration: tri-flash mode 75h / 170h / 430h / 770h		Weight: 1,55 Kg 3,5 kg ((with moplén case)
	Light emission: Yellow (amber)		Twilight: on request		Photovoltaic kit: 50 W		Temperature: -15 °C - +85 °C

Code: **201900310-201900130** (tri-flash mode)

	Certifications: optics with Ministerial approval		Luminous intensity: UNI EN 12352 (class L9M)		Consumption: 1350 mA		Dimensions (H / L / W): 34 x 34 x 4,5 cm
	Light source: nr. 232 high intensity leds		Power supply: 12 V _{dc}		Twilight: absent		Weight: 1,55 Kg
	Light emission: steady Yellow (amber)		Type connection to the battery: with 1mm ² cable		On/off switch: absent		Temperature: -15 °C - +85 °C

Code: **201900346** (slave light - steady light)

/ Product Description /

The flashing LED amber diameter 300 mm, consists of 2 shells (one front - lens, one rear - base) made of plastic "Lexan" transparent particularly resistant to impact and atmospheric agents.

The coupling of 2 shells is ensured by constraints interlocking screws and nuts. The electronic board with leds mounted inside the flashing light is bound by appropriate supports and constraints on rotation.

The correct position of the flashing light is suggested by the two arrows embossed on

the rear shell; to obtain a perfect light emission the 2 arrows must be facing upwards and downwards (perpendicular to the road surface).

The flashlight comes with power supply cable with eyelet terminal for connection to battery.

/ Norms /

- Article 21 of the Road Code
- Article 31-36 of Regulation Enforcement and implementation of the Road Code
- Ministerial Decree Of July 10, 2002 published in the Official Gazette no. 226 of 26 September 2002
- European Directive 2004/108/EC and the CE marking
- In compliance with EN 12352 with light intensity is in category L9M



// Features Description //

The flashing light is used primarily for warning of situations that need special attention (hazard) and/or to indicate the presence of road works.


The conformation of the flashing light allows the application on any surface and/or support plan, making it versatile and easy to install.

The flashlight comes with standard flashing, on specific request can be supplied with triflash flashing.

// Mechanical Properties //

Shell front and rear transparent plastic "Lexan".

// How to fix the optic //

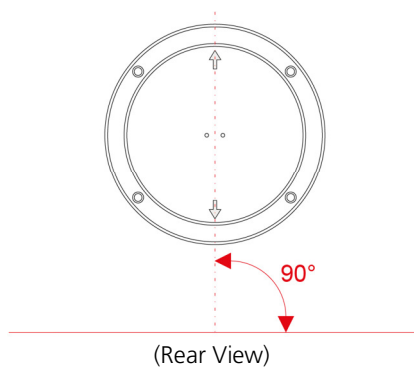

// Remote Control //

It can be fitted with an optional remote control that ensures high versatility allowing to choose the most suitable type of flash.

